

# DRAIN STINGER

## FEATURES


- > Heavy duty SS construction for sturdy, long term and frequent use
- > Quickly connects to existing foamers; no need for specialized foaming equipment
- > SS 3/4" construction does not break down foam solution
- > Large square cover plate to handle large drain openings
- > Pushes the foam below the "J" trap for better coverage
- > Designed to work with KC-635 HF, the only EPA approved drain biofilm disinfectant

## USAGE

- > Removes and controls plugging/odors from biofilm and organic drain contaminants
- > Foam on drain surface for 10 minutes then air dry or rinse
- > Foam must completely fill pipe and push water through the "J" trap
- > For weekly use

Pathogens and biofilm can accumulate in drains, especially on drain walls above the normal fluid level.

Foam provides 360° contact along pipe walls for maximum sanitation.

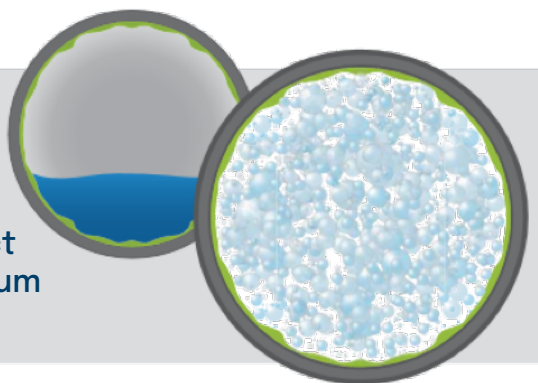

## PRODUCT ORDERING

	Item #
Drain Stinger	91015



ADDRESS 1501 E 8th St, North Little Rock, AR 72114

PHONE (501) 758-8500

EMAIL [SalesSFCI@fortrexsolutions.com](mailto:SalesSFCI@fortrexsolutions.com)